


Step 3 Put the cartridges into machine.

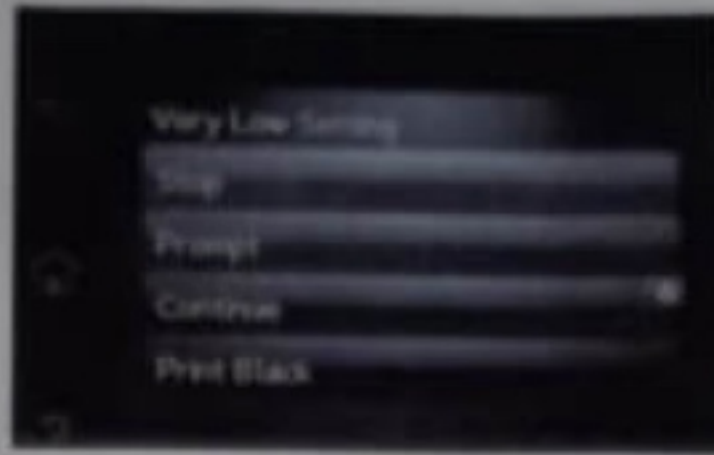

Put the cartridges into machine properly according to the colors.

Follow the on-screen instructions to start a new printing job. Main Menu—Setup—Supply Settings—Black/Color Cartridge—Very Low Setting—Continue.

NOTE: YOU MAY SKIP THE STEPS IF A MESSAGE THAT REPLACE THE TONER CARTRIDGE IS NOT DISPLAYED.

Step 4 Calibrate the printer for better print performance.


- ① Touch Screen Control Panel: click Setup, choose System Setup—Print Quality—Color Calibration—Calibrate Now.
- ② LCD Control Panel: Press OK to homepage—System Setup—Print Quality—Color Calibration—Calibrate Now—OK.
- ③ No Control Panel: Follow the steps below to calibrate.



(1) Double click the printer icon on the desktop.



(2) Go to "HP Device Toolbox", then click "System"—"Print Quality".

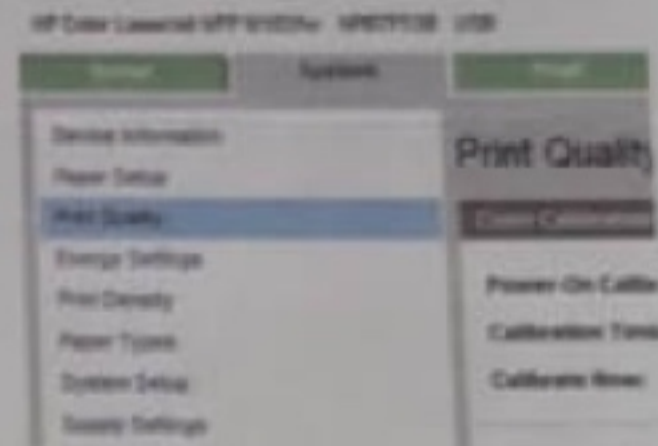

(3) Tick "Calibrate Now", then choose "Apply".

④ Power off and on for 15 minutes, printer can do calibration job by itself.